

(PRODUCTS)

HYDRAULIC TROLLEY JACKS



All models, TJ-1,5A excluded, are fitted with a foot pedal for quick approach of the lifting saddle to load.

The models under 6t are fitted with polyamide wheels and castors to facilitate manoeuvrability. These wheels will not damage garage floors, do not rust and are quiet in operation.

The rubber coated "T" handle facilitates easier operation.

Optional: rubber pad for the saddles. Ref.: A-5180.



The reduced height (45 mm without saddle and 70 mm with saddle) allows easier access. Internal and retractable wheel for easier manoeuvrability. Robust and wide front wheels for durability and stability only work when under load.



TJ-2A



TJC-2A

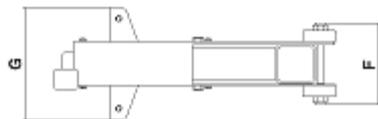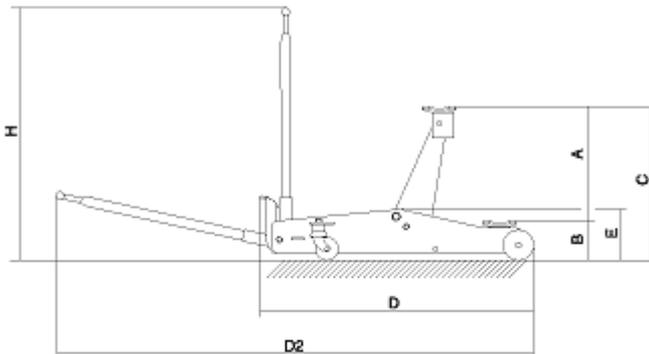

TJ-1,5LA

High lifting range. Maximum height: 815 mm.

Capacity (t)	1,5	1,5	2	2	2	3	6	10	12	15	20
Measures (mm)											
A	365	690	365	395	365	380	380	380	380	395	380
B	125	125	125	45*	125	145	195	195	195	180	205
C	490	815	490	465	490	525	575	575	575	575	585
D	855	1270	900	900	1175	1220	1300	1600	1600	1845	1845
D 2	1670	2255	1885	1885	2030	2215	2300	2600	2600	2845	2845
E	165	180	165	150	165	190	220	260	260	255	300
F	220	375	245	270	220	250	300	345	350	220	270
G	345	375	360	360	345	350	425	425	425	360	410
H	990	1100	990	990	990	1100	1100	1100	1100	1110	1120
Weight (kg)	33	60,5	34,5	41	37	52	82	111,5	130,5	160	257
											
References	TJ-1,5A	TJ-1,5LA	TJ-2A	TJC-2A	TJ-2MA	TJ-3A	TJ-6A	TJ-10A	TJ-12A	TJ-15A	TJ-20A

* without saddle