





## Bravo 600

Electrical submersible slurry pump

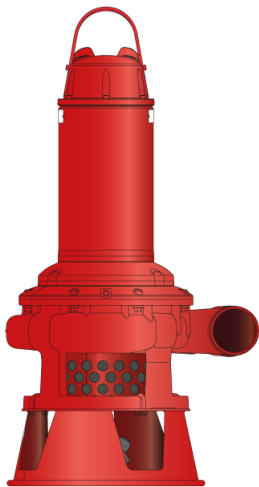

50 Hz	Bravo 600
Discharge connection	4"
Rated power $P_2$ [kW]	22
Max. power consumption $P_1$ [kW]	25
Shaft speed [rpm]	1460
Rated current at 230V	73 A
Rated current at 400V	41 A
Rated current at 500V	33 A
Solids passage with agitator [mm]	40
Height [mm]	1273
Diameter [mm]	595
Weight [kg]	293

Other voltages on request

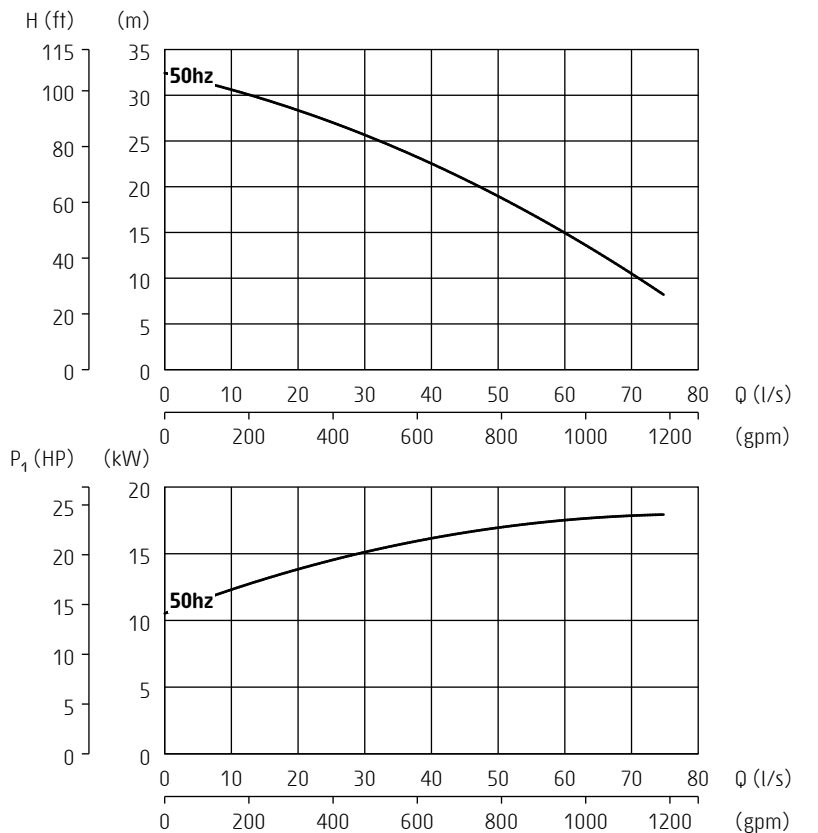

ISO 9906/A

### General description

Pump with closed impeller and agitator for reliable pumping of highly abrasive slurry in high concentrations

### Classification

Electrical submersible slurry pump  
Protection class: IP 68

### Electrical motor

Squirrel cage induction motor  
Insulation class: H (IEC 85), DOL or star/delta

### Motor protection

Thermoswitches in motor windings

**This pump must be used with external motor protection in accordance with technical data**

### Cable - SubCab 20 m (66 ft)

230V DOL: 4x16mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
230V Y/D: 7x6mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
400-500V DOL: 4x6mm<sup>2</sup> + 2x1.5mm<sup>2</sup>  
400-500V Y/D: 7x4mm<sup>2</sup> + 2x1.5mm<sup>2</sup>

### Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: tungsten carbide - tungsten carbide

Material upper seal: tungsten carbide - tungsten carbide

### Materials

Drive unit: Cast iron

Pump housing: Hard-Iron™

Impeller: Hard-Iron™

Lifting handle: Stainless steel

Shaft: Stainless steel

Agitator: Hard-Iron™

Studs, screws and nuts: Stainless steel

O-rings: Nitrile rubber

### Limitations

Max. submersion depth: 20 m (66 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5.5 - 14



Turoteknikk Drift AS, Hildertunet 2, N-1341 Slependen, Norway

+47 67806300—mail@turoteknikk.no—www.turoteknikk.no

Specifications can be changed without notice