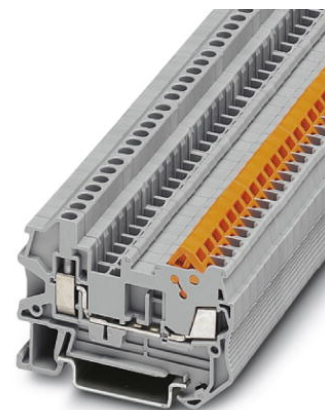



**QTCU 1,5**

Item No.: 3050015

<http://eshop.phoenixcontact.no/phoenix/treeViewClick.do?UID=3050015>**Commercial data**

EAN	 4 017918 975722
Electrical number	1266224
Pack	50 pcs.
Customs tariff	85369010
Discount Group	01B
country of origin	CN
Catalog page information	Page 230 (CL-2009)

**Product notes**WEEE/RoHS-compliant since:  
01.01.2003

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Generelt**

Antall etasjer	1
Antall tilkoblinger	2
Farge	grå
Isolasjonsmaterial	PA
Brennbarhetsklasse iht. UL 94	V0

**Dimensjoner**

Bredde	5,2 mm
Lengde	58,8 mm

---

Høyde NS 35/7,5	42,8 mm
Høyde NS 35/15	50,3 mm
Dekselbredde	2,2 mm

**Tekniske data**

Belastningsstrøm maksimal	17,5 A (ved 1,5 mm <sup>2</sup> ledertverrsnitt)
Merkestøtspenning	8 kV
Forurensningsgrad	3
Overspenningskategori	III
Isolasjonsmaterialgruppe	I
Tilkobling iht. standard	IEC 60947-7-1
Nominell strøm I <sub>N</sub>	17,5 A
Nominell spenning U <sub>N</sub>	800 V

**Tilkoblingsdata**

Min. entrådet ledertverrsnitt	0,25 mm <sup>2</sup>
Maks. entrådet ledertverrsnitt	1,5 mm <sup>2</sup>
Min. flertrådet ledertverrsnitt	0,25 mm <sup>2</sup>
Maks. flertrådet ledertverrsnitt	1,5 mm <sup>2</sup>
Ledertverrsnitt AWG/kcmil min	24
Ledertverrsnitt AWG/kcmil max	16
Tilkoblingstype	Hurtigtilkobling
Material lederisolasjon	PVC/PE

**Address**

PHOENIX CONTACT AS  
Strømsveien 344  
N-1001 Oslo, Norway  
Phone +47 22 07 68 00  
Fax +47 22 07 68 10  
<http://www.phoenixcontact.no>



Phoenix Contact AS  
Technical modifications reserved;